



**HAL**  
open science

# A reduced-order piecewise-linear model of squeeze-film damping for deformable structures including large displacement effects

Alexia Missoffe, Denis Aubry, Jérôme Juillard

► **To cite this version:**

Alexia Missoffe, Denis Aubry, Jérôme Juillard. A reduced-order piecewise-linear model of squeeze-film damping for deformable structures including large displacement effects. DTIP Design Test Integration and Packaging of NEMS/MOEMS, Apr 2008, Nice, France. pp. 229-231. hal-00354572

**HAL Id: hal-00354572**

**<https://hal-centralesupelec.archives-ouvertes.fr/hal-00354572>**

Submitted on 20 Jan 2009

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# A reduced-order piecewise-linear model of squeeze-film damping for deformable structures including large displacement effects

A.Missoffe<sup>1</sup>, J.Juillard<sup>1</sup>, D.Aubry<sup>2</sup>

<sup>1</sup>SUPELEC, Dpt. SSE, 3 rue Joliot-Curie, 91192 Gif-sur-Yvette, FRANCE.

E-mails: alexia.missoffe@supelec.fr, [jerome.juillard@supelec.fr](mailto:jerome.juillard@supelec.fr).

<sup>2</sup>LMSS-MAT, ECP, CNRS UMR 8579, Grande Voie des Vignes, 92295 Châtenay-Malabry Cedex, FRANCE.

Email : [denis.aubry@ecp.fr](mailto:denis.aubry@ecp.fr).

Oral presentation

## Introduction

Correct modelling of damping is essential to capture the dynamic behaviour of a MEMS device. Our interest is squeeze-film damping which models the behaviour of a fluid in small gaps between a fixed surface and a structure moving perpendicular to this surface. The lateral dimensions of the surfaces are large compared to the gap and the system is considered isothermal. Squeeze film damping is then governed by the Reynolds equation [1]:

$$\nabla \left( \frac{G^3}{12\mu} P \nabla P \right) = \frac{\partial(GP)}{\partial t}, \quad (1)$$

where  $G(x, y, t)$  is the distance between the moving and the fixed surface,  $P(x, y, t)$  is the pressure,  $\mu$  the effective viscosity of the fluid [1]. For small excitation frequencies or amplitudes the squeezed film behaves as a linear damper. For larger amplitudes or frequencies, the gas has no time to flow away and the pressure builds up creating a stiffening effect coupled to a nonlinear damping. The boundary conditions for (1) are usually chosen as trivial: zero pressure variation or zero pressure gradient, although some authors have considered less ideal, frequency-dependent and aspect-ratio dependent boundary conditions [2-3]. A complete review on this equation and its different regimes can be found in [4].

Coupling the Reynolds equation to the equation governing the mechanical behaviour of the microstructure leads to a nonlinear system of partial differential equations (PDEs), which has no analytical solution and must be simplified thanks to some assumptions. The most commonly made assumptions are the following:

- uniform displacements, i.e.  $\frac{\partial G}{\partial x} = \frac{\partial G}{\partial y} = 0$  (for example, [5]).
- steady-state sinusoidal excitation, i.e.  $G = G_e \sin(\omega t)$  [6-7].
- small displacements, i.e.  $G = G_0 + g$  and  $g \ll G_0$ , where  $G_0$  is the nominal gap of the structure at rest or close to a static equilibrium [8-9].
- small pressure variations, i.e.  $P = P_0 + p$  and  $p \ll P_0$ , where  $P_0$  is the ambient pressure.

These hypotheses prove to be useful in a variety of applications, if only for gaining insight of nonlinear damping phenomena. However, in many cases, it is difficult to justify their use: for example, it is clear to see that none of the first three hypotheses holds when trying to estimate the switching time of a micro-switch. Most micro-switches do not undergo uniform displacements, nor can these displacements be considered small, and the behaviour of a micro-switch is fundamentally transient.

To date, the most notable attempts to tackle the problem of reduced-order modelling (ROM) of squeeze-film damping with large, non-uniform displacements have been made by Younis *et al.* [10-12], Mehner *et al.* [6,13], Yang *et al.* [14-15], Hung and Senturia [16] and Rewiński and White [17-18]. In [10-12], the authors propose to solve the nonlinear Euler-Bernoulli beam equation to determine the static deformation of a microplate under a voltage bias. The von Karman plate equations and the compressible Reynolds equation are then linearized close to this operating point and a perturbation method is used to calculate the pressure deviation. In [6,13], the authors use a modal projection method to calculate modal frequency-dependent damping and stiffening coefficients close to a determined operating point. To extend this approach to large displacements, Mehner [6] gives an analytical expression of these coefficients as a function of mechanical modal coordinates established by fitting of simulation data for different initial deformations. These approaches are all based on several steady-state sinusoidal calculations [10-12] or simulations [6,13], which increase the time for setting up the reduced-order model. The most general approaches may well be those developed in [14-18]: the authors rely on fully-coupled, nonlinear transient simulations of the complete system (usually a micro-switch) to establish a reduced-order model of the microstructure. These approaches are very general and they can even be successfully applied to the fully nonlinear Reynolds equation (1). However, they have a high computational cost (because of the nonlinear/multiphysics/transient simulation they require) and their accuracy depends, to some degree, on the choice of the training trajectory.

We present a reduced-order model of the Reynolds equation which is valid for large, non-uniform displacements and transient excitation but with the restriction of small pressure variations. This hypothesis is valid for a microswitch as shown by the results presented in [19].

## Construction of the reduced-order model

We work on the variable  $p = P - P_0$ , supposing  $p \ll P_0$ . (1) has then the following form:

$$\nabla \left( \frac{G^3}{12\mu} \nabla p \right) = \frac{\partial}{\partial t} \left( G \left( 1 + \frac{p}{P_0} \right) \right) \quad (2)$$

The first reduction step is based on modal projection of (2) which is first transformed via a change of variable on  $p$ . The aim of this change of variable is to obtain a spatial operator for which the Laplacian eigenmodes are more relevant than for the operator in (2), conserving its self-adjoint property thus guarantying convergence of the solution. The reduced-order model may be written as:

$$\frac{d}{dt} (\mathbf{A}(\mathbf{x})\mathbf{s} - \mathbf{f}(\mathbf{x})) = \mathbf{H}(\mathbf{x})\mathbf{s}, \quad (3)$$

where  $\mathbf{x}$  and  $\mathbf{s}$  are respectively the vectors of the mechanical modal coordinates of the moving structure, and of the modes corresponding to the Reynolds equation. For a structure under electrostatic actuation, one may write the full coupled model as:

$$\frac{d}{dt} (\mathbf{g}(\mathbf{z}(t)) = \mathbf{f}(\mathbf{z}(t)) + \mathbf{B}(\mathbf{z}(t))u(t) \quad (4)$$


where  $\mathbf{z}$  is the state vector including all modal coordinates. The cost of evaluating the terms  $\mathbf{g}(\mathbf{z}(t))$ ,  $\mathbf{f}(\mathbf{z}(t))$ , and  $\mathbf{B}(\mathbf{z}(t))$  is reduced using a piecewise linear approach described in [17]. The fact that the coefficients in (3) only depend on the mechanical modal coordinates reduces the cost of construction of the piecewise linear model, which has the following structure:

$$\frac{d}{dt} \left[ \sum_{i=0}^{s-1} w_i(\mathbf{z})(\mathbf{g}(\mathbf{z}_i) + \mathbf{J}\mathbf{G}_i(\mathbf{z} - \mathbf{z}_i)) \right] = \sum_{i=0}^{s-1} w_i(\mathbf{z})(\mathbf{f}(\mathbf{z}_i) + \mathbf{J}\mathbf{F}_i(\mathbf{z} - \mathbf{z}_i)) + \mathbf{F}_{elec}(\mathbf{z}) \quad (5)$$


where  $\mathbf{J}\mathbf{G}_i$  and  $\mathbf{J}\mathbf{F}_i$  are respectively the jacobians of the functions  $\mathbf{g}(\mathbf{z})$  and  $\mathbf{f}(\mathbf{z})$  at the linearization points  $\mathbf{z}_i$  and  $\mathbf{F}_{elec}(\mathbf{z})$  corresponds to the electrostatic force. Two problems arise from the piecewise linearization: the choice of the linearization points and the weighting procedure. We choose the linearization points from a simulation of the first reduced model. A new linearization point is chosen when a point is far enough from the already chosen points. We normalize the state variables to calculate the distances so as to take into account all state variables with the most relevance. The weighting procedure is the one described in [17].

## Validation of the reduced-order model

We work on the example of a microswitch also treated in [16-18]. We use the piecewise linear reduced order model to determine the switching time of the device for a step voltage between 9 and 10.5 V at atmospheric ambient pressure. The 21 linearization points are chosen along a 9.5V input training trajectory. Fig.1 shows the response to a 10V input using a linear model, the modal projection model, and the piecewise linearized model. Fig.2 shows the experimental and simulated data presented in [16] and results of our piecewise linear reduced model of order 6 for the switching time.

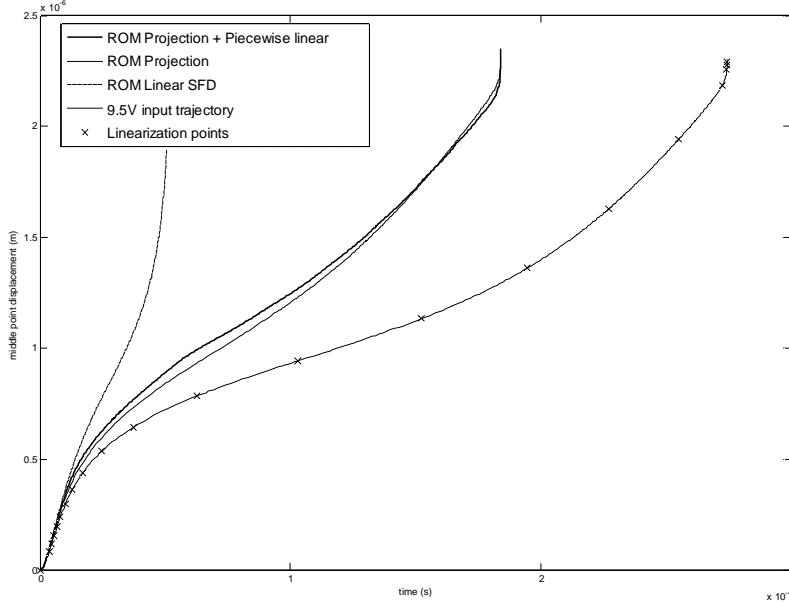

**Figure 1-** Middle point displacement of a microswitch for a linear model, the projected model and the projected and piecewise linearized model (1 mechanical mode, 4 squeeze modes) for a 10V step voltage. The 21 linearization points are chosen along a 9.5V input trajectory.

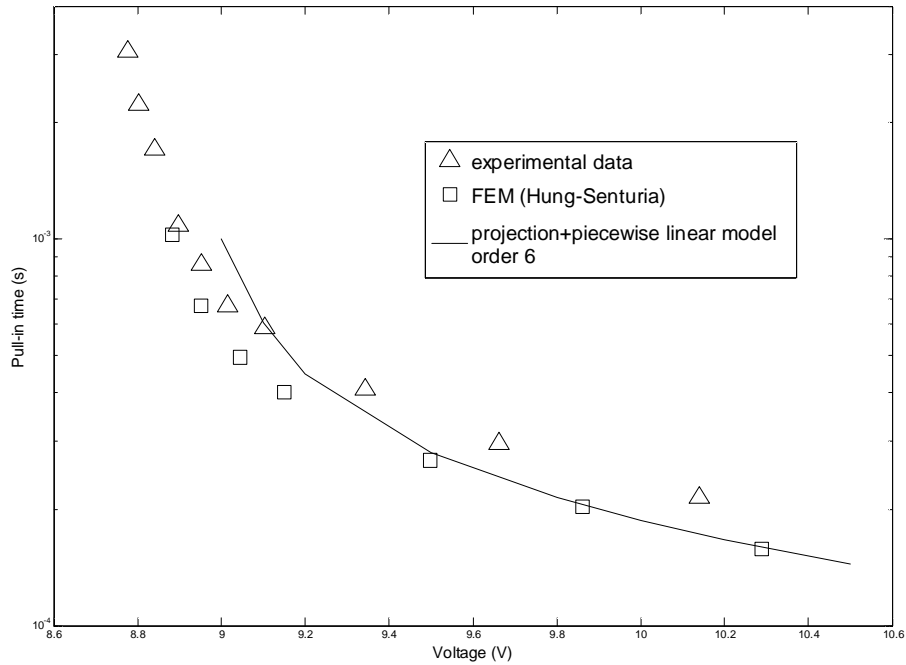

**Figure 2** - Pull-in time (s) versus applied voltage (V) for  $P_0=1.013\times 10^5$  Pa. Comparison of the experimental and simulated results presented in [16] to the simulated results obtained with our reduced-order model. The chosen squeeze modes correspond to  $k_1=0, 2$  and  $k_2=1, 3$  in (38). For the mechanical part, the first eigenmode is used.

## Further work

We can notice that the nonlinear terms depend only on the mechanical modal coordinate and that the model is linear in the modes concerning the Reynolds equation. It can be written as:

$$\frac{d}{dt}(\mathbf{G}(\mathbf{x})\mathbf{z} - \mathbf{FP}(\mathbf{x})) = \mathbf{B}(\mathbf{x})\mathbf{z} \quad (6)$$

The piecewise linearization described above doesn't take advantage of this structure. Another piecewise linearized model can be based on the linearization of the terms  $\mathbf{G}$ ,  $\mathbf{FP}$  and  $\mathbf{B}$ . As they only depend on the on mechanical coordinate, there is no need for a training trajectory. It is sufficient to discretize in an appropriate way the one dimensional space corresponding to the mechanical coordinate. This is a great advantage as the resulting model does not depend on the relevance of a training trajectory, one the main drawbacks of the model presented above. On the other hand the resulting equation is nonlinear which increases the resolution cost. Full results of this model will be presented.

## References

- [1] M.H. Bao, "Micro mechanical transducers: pressure sensors, accelerometers and gyroscopes", Handbook of Sensors and Actuators, vol. 8, Elsevier, Amsterdam, 2000
- [2] T. Veijola et al., "Extending the validity of squeezed-film damper models with elongations of surface dimensions", Journal of Micromechanics and Microengineering, vol. 15, pp. 1624-1636, 2005
- [3] A. K. Pandey et al., "Influence of Boundary Conditions on the Dynamic Characteristics of Squeeze Films in MEMS devices", Journal of Microelectromechanical Systems, vol. 16, pp. 893-903, 2007

- [4] M.H. Bao, H. Yang, "Squeeze film air damping in MEMS", *Sensors and Actuators A*, vol. 136, pp. 3-27, 2007
- [5] T. Veijola et al., "Equivalent-circuit model of the squeezed gas film in a silicon accelerometer", *Sensors and Actuators A*, vol. 48, pp. 239-248, 1998
- [6] J. E. Mehner et al., "Reduced-order modeling of fluid-structural interactions in MEMS based on modal projection techniques", *12<sup>th</sup> International Conference on Solid-State Sensors, Actuators and Microsystems*, 2003, vol. 2, pp. 1840-1843
- [7] F. Pan et al., "Squeeze film damping effect on the dynamic response of a MEMS torsion mirror", *Journal of Micromechanics and Microengineering*, vol. 8, pp. 200-208, 1998
- [8] Pu Li et al., "A new model for squeeze-film damping of electrically actuated microbeams under the effect of a static deflection", *Journal of Micromechanics and Microengineering*, vol. 17, pp. 1242-1251, 2007
- [9] M. I. Younis, A. H. Nayfeh, "Microplate Modeling under Coupled Structural-Fluidic-Electrostatic Forces", *7<sup>th</sup> International Conference on Modeling and Simulation of Microsystems*, 2004, pp. 251-254
- [10] M. I. Younis, "Modeling and Simulation of Microelectromechanical Systems in Multi-Physics Fields", Virginia Polytechnic Institute, Ph. D. Thesis, 2004
- [11] M. I. Younis, A. H. Nayfeh, "Simulation of squeeze-film damping of microplates actuated by large electrostatic load", *Journal of Computational and Nonlinear Dynamics*, vol. 2, pp. 232-241, 2007
- [12] M. I. Younis, A. H. Nayfeh, "A new approach to the modeling and simulation of flexible microstructures under the effect of squeeze-film damping", *Journal of Micromechanics and Microengineering*, vol. 14, pp. 170-181, 2004
- [13] J. Mehner et al., "Simulation of gas damping in microstructures with nontrivial geometries", *11<sup>th</sup> Annual International Workshop on Micro Electro Mechanical Systems*, 1998, pp. 1726-177
- [14] Y. J. Yang, "Squeeze-film damping for MEMS structures", Ph. D. Thesis, Massachusetts Institute of Technology, 1998
- [15] Y. J. Yang et al., "Macromodeling of coupled-domain MEMS devices with electrostatic and electrothermal effects", *Journal of Micromechanics and Microengineering*, vol. 14, pp. 1190-1196, 2004
- [16] E. S. Hung, S. D. Senturia, "Generating efficient dynamical models for microelectromechanical systems from a few finite-element simulation runs", *Journal of Microelectromechanical Systems*, vol. 8, pp. 280-289, 1999
- [17] M. Rewienski, "A Trajectory Piecewise-Linear Approach to Model Order Reduction of Nonlinear Dynamical Systems", Massachusetts Institute of Technology, 1998
- [18] M. Rewienski, J. White, "A trajectory piecewise-linear approach to model order reduction and fast simulation of nonlinear circuits and micromachined devices", *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, vol. 22, pp. 155-170, 2003
- [19] J. Juillard, A. Missoffe, D. Aubry, "A reduced-order model of squeeze-film damping for deformable structures including large displacement effects", submitted to *Journal of microelectromechanical systems*, September 2007

**Keywords** : squeeze-film damping, reduced-order modelling, microswitch, piecewise linear.

Alexia Missoffe received her Electrical Engineering Degree from Supélec, France, and has an Msc in Microsystems from Heriot Watt University, Scotland UK. She is currently working towards her PhD in reduced-order modelling of MEMS at Supélec.